



CMT 50

STRAPPING TOOL

CYKLOP[®]
GLOBAL PACKAGING SOLUTIONS

STRAPPING
WRAPPING
CODING
TAPING


Wherever medium-weight packages require a high strap tension and where work is done in different places, the CMT 50 strapping tool is the optimal choice. The CMT 50 is manually tensioned (separate strap insertion) with a tension of up to 2,300 N. After tensioning, the trap is welded together. The device is suitable for strapping PP and PET straps, is fully mobile and flexible.

Advantages

- For PP and PET strap
- Up to 2,300 N strap tension
- Fully mobile and flexible
- Ergonomic design
- No seals or buckles needed

Accessories

- Strap dispenser QPWK
- Strap dispenser QPWM
- Battery and charger

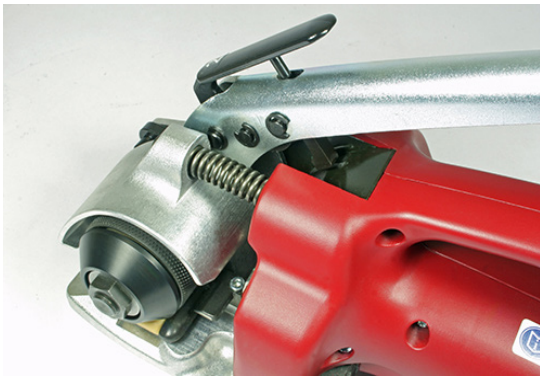

Technical specifications:	
Type of strapping material	Polyester (PET) Polypropylene (PP)
Strapping material	PET 9 - 19 mm x 0,5 - 1.0 mm
	PP 9 - 16 mm x 0.5 - 1.0 mm
Dimensions (L x W x H)	400 x 130 x 200 mm
Weight	4.0 kg (incl. battery)
Strap tension	0 - 2,300 N (depending on strap quality and package)
Weld	Friction weld
Insertion	Separate strap insertion
Battery	NiCd-Battery 12 V
Strappings per battery charge	Max. 200
Number of charges	Up to 2.000
Power supply charger	230 V